

## SG2100

YOUR CONFIDENCE TO BE THE BEST




### FEATURE:

- Special Design for Receiver with DiSEqC 1.2
- Only One Coaxial Cable Control
- Go To X Function
- High Efficiency
- Compact Structure
- Ultra Low Noise
- Adjustable Hardware Limits
- Easy Installation with LED Indicator
- Manual EAST / WEST button
- For Dish up to 1.2M

**Specification:**

Model	SG2100
Antenna Diameter	1.2M Max.
Length of Motor Tube	18cm
Azimuth Angle	75°EAST ~ 75°WEST ( 150° ) Adjustable
Elevation Angle	10°~75°
Input / Output Voltage	13 / 18 VDC
Power Consumption	50 mA ( Standby mode ) 200mA ( Normal) 350 mA ( Max.)
Rotation Speed	1.9° / sec ( at 13V ) ; 2.5 °/ sec ( at 18V)
Satellite Positions	60
Connector	F Type
Command Protocol	DiSEqC 1.2
Resynchronize Function	YES
Goto Position 0 Function	YES
Goto X Function	YES
Positioning Sensor	Hall Effect Sensor
EAST / WEST Limit	Adjustable Hardware and Programmable Software
Manual Button	EAST / WEST

## How to Connect:

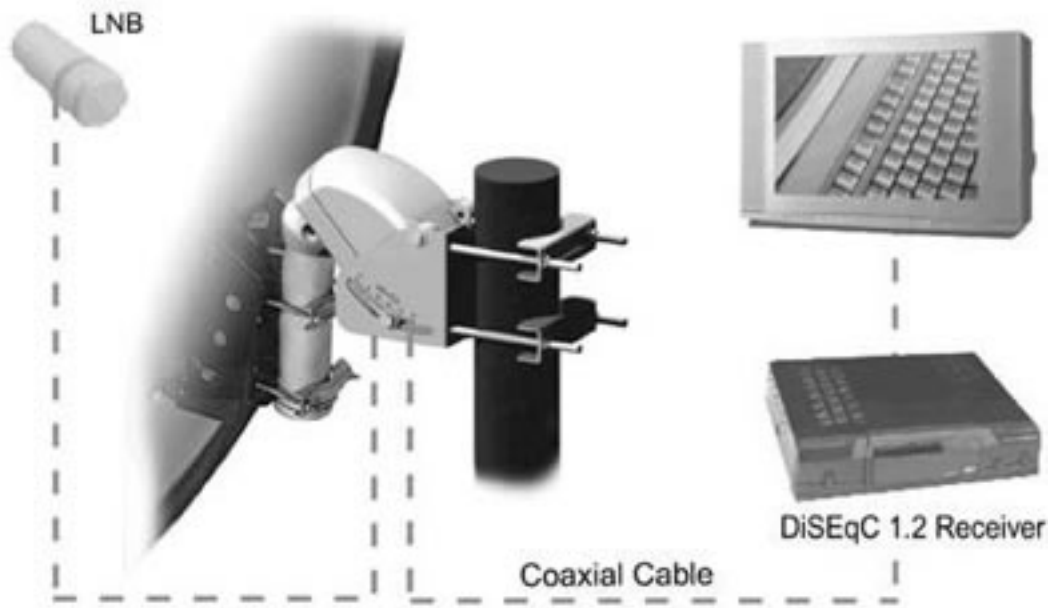

© COPYRIGHT 2002 MOTECK ELECTRIC CORP.